Taumatatotara Windfarm Ltd.

# LANDSCAPE AND VISUAL ASSESSMENT PROPOSED VARIATION TO CONSENT

22 MARCH 2021





### LANDSCAPE AND VISUAL ASSESSMENT PROPOSED VARIATION TO CONSENT

Taumatatotara Windfarm Ltd.

WSP Christchurch 12 Moorhouse Avenue Christchurch 8011 New Zealand +64 3 363 5400 wsp.com/nz

REV DATE		DETAILS			
3	22 March	2021			
N		Name		date	signature
Prepared by:		Jeremy Head		11 March 2021	J.E.Hend.
Reviewed by:		David McKenzie		22 March 2021	Damelini
Approvec	l by:	Zoe Burl	kitt	22 March 2021	2 Guton

This report ('Report') has been prepared by WSP exclusively for Taumatatotara Windfarm Ltd. ('Client') in relation to the preparation of a Landscape and Visual Assessment report to be submitted to the Waitomo District Council as part of a wider Assessment of Environmental Effects ('Purpose') and in accordance with the agreement dated 14 October 2020. The findings in this Report are based on and are subject to the assumptions specified in the Report and other technical documents provided by the Client. WSP accepts no liability whatsoever for any reliance on or use of this Report, in whole or in part, for any use or purpose other than the Purpose or any use or reliance on the Report by any third party.

# wsp

# TABLE OF CONTENTS

1		]
2	REFERENCE DOCUMENTS	3
3	LANDSCAPE CONTEXT	4
3.1	BROADER LANDSCAPE CHARACTER	4
3.2	SITE CONTEXT	4
4	METHODOLOGY	6
5	DESCRIPTION OF PROJECT	9
6	STATUTORY DISCUSSION	10
6.1	WAIKATO REGIONAL POLICY STATEMENT	10
6.2	WAITOMO DISTRICT PLAN	10
7	ASSESSMENT OF THE LANDSCAPE AND	
	VISUAL EFFECTS	12
7.1	LANDSCAPE EFFECTS	12
7.2	VISUAL EFFECTS	13
7.3	EFFECTS OF DISTANCE ON RECEPTORS	14
7.4	VISUAL EFFECTS ARISING FROM THE SPECIFICS OF THE PROPOSAL	
7.4.1	ZONE OF THEORETICAL VISIBILITY (ZTV) MAPS	
7.4.2	HUB AND TOWER HEIGHT	
7.4.3	BLADE TIP HEIGHT (OVERALL TURBINE HEIGHT)	
7.4.4 7.4.5	CHANGES AT GROUND LEVEL SHADOW FLICKER	
7.4.5 7.4.6	VISUAL EFFECTS ON SPECIFIC IDENTIFIED THIRD-	10
	PARTY DWELLINGS IN THE RECEIVING ENVIRONMENT	16
7.4.7	SUMMARY - VISUAL EFFECTS ON PRIVATE THIRD-	~ ~ ~
7.4.8	PARTY DWELLINGS VISUAL EFFECTS FROM PUBLIC PLACES (ROADS)	
7.5	CONCLUSION - VISUAL EFFECTS	

# wsp

8	AVOIDANCE, MITIGATION AND	
	REMEDIATION OF EFFECTS	24
9		25
10	LIMITATIONS	
TABL	Ξ 1:	
COMP	ARISON	28
APPE	NDIX 1	
NEARI	EST 3 <sup>RD</sup> PARTY HOUSES	29
APPE	NDIX 2	
	ENTED TURBINE LOCATIONS PLAN	
	NDIX 3	
SEVEN	POINT SCALE OF EFFECTS	

# 1 INTRODUCTION

WSP has been commissioned by Taumatatotara Windfarm Ltd (TWF) to prepare a Landscape and Visual Assessment (LVA) to assess the landscape and visual effects of a proposed variation to consent RM050019 regarding a twenty-two-turbine windfarm at Taumatatotara West Road, Te Anga, West Waikato (the 'T4' windfarm) (**Attachment 1**). Specifically, the LVA addresses the landscape and visual effects of a change in height of eleven of twenty-two wind turbines and a reduction in the number of turbines from twenty-two to eleven at the consented Taumatatotara Windfarm site.

As required under section 127 of the Resource Management Act ("RMA") this application is for a discretionary activity change of the existing consent conditions.

An assessment of effects is required to ascertain any potential adverse and positive effects of the variation of the consent conditions on landscape character and visual amenity. This assessment responds to TWF's request to reduce the size of the windfarm from twenty-two to eleven wind turbines<sup>1</sup> and increase the tip height (overall height) of the remaining eleven turbines from the consented 110 m to 172.5 m. Twenty-two 110 m tall<sup>2</sup> turbines are to date consented (but unbuilt) at the site<sup>3</sup>.

This report will include a discussion on the:

- Effects on landscape and visual amenity.
- Proposal's distance from potentially affected parties where the adverse effects will be at worst 'low'<sup>4</sup> and for the majority, 'positive' effects at varying degrees.
- Methodological approach used in rating the effects.

The site is located approximately 6.5 km northwest of Te Anga, which is approximately 30km west of the Waitomo Caves area, within the Waitomo District. The area where the windfarm is proposed, well to the west of the tourist 'terminus' at the Waitomo Caves and substantially north of Marokopa Road means the environment where the site is located is sparsely occupied, or otherwise passed through - one reason for locating a windfarm here. It is unlikely that many tourists would venture further west from the Waitomo Caves, or northwards onto Taumatatotara Road to Taharoa.

The Project is situated along a ridge line with turbines being in a northwest/southeast line, straddling the Taumatatotara West Road. In the Waikato Regional Landscape Assessment (WRLA), the site is located within the Western Hill Country landscape type. Within the WRLA the area where the site is located is not categorised as an Outstanding Natural Landscape/Feature (ONLF).

<sup>&</sup>lt;sup>1</sup> 'Turbines' refers to the mast, nacelle, hub and blades (the entire structure).

<sup>&</sup>lt;sup>2</sup> It is understood that a recent consent variation was granted to increase the turbine heights from 110m to 121.5m tall for the eleven turbines. However, this assessment is based on the potential visual and landscape effects arising from the increase in height between what is proposed now and the first consent.

<sup>&</sup>lt;sup>3</sup> The 'site' refers to the ridgeline where the twenty-two consented turbines are located.

<sup>&</sup>lt;sup>4</sup> Low: A low level of effect on the character or key attributes of the receiving environment and/or the visual context within which it is seen; and/or have a low level of effect on the perceived amenity derived from it. (Oxford English Dictionary Definition: Low: adjective-below average in amount, extent, or intensity).

It is considered that the primary issue is whether a windfarm is appropriate in this setting or not. In this regard both landscape and visual effects are relevant. As twenty-two turbines have been consented to date, the decision regarding the appropriateness of such a proposed change to the setting has already been made based on the various assessments provided to date.

It is also noted that the originally consented twenty-two 110m tall turbines are very large structures. Given the relatively sparsely lived-in and visited site context<sup>5</sup>, it is anticipated that an increase in height (within reason) of a substantially reduced number of individual structures is not likely to trigger additional landscape character or visual effects that would be unacceptable given the existing consented setting.

<sup>&</sup>lt;sup>5</sup> The site context is the 'study area' considered to be where there will be adverse or positive landscape or visual effects of the proposal. The proposal may be visible beyond the site context; however, any effects from here will be negligible – neither adverse or positive.

# 2 REFERENCE DOCUMENTS

This report should be read in association with the Taumatatotara Windfarm Application to Change Conditions of Consent<sup>6</sup>, which provides the background history to the original submission for the ultimately consented windfarm scheme.

In addition, wire-frame diagrams, visual simulations, and plans showing the Zone of Theoretical Visibility (ZTV) (Attachments 2 - 10) have been produced by Energy3 Services Ltd.<sup>7</sup>, engaged by the Applicant and where relevant have been referenced within this report.

Regarding landscape, visual and amenity planning matters, the assessment component of this report is in accordance with relevant provisions of Part 2 and the Fourth Schedule of the Resource Management Act 1991 (RMA).

<sup>7</sup> Energy3 Services Ltd. specialise in windfarm development and assessment / visualisations.

3-C2022.00 Landscape and Visual Assessment Proposed Variation to Consent Taumatatotara Windfarm Ltd.

<sup>&</sup>lt;sup>6</sup> by Shearer Consulting 5 July 2020.

# 3 LANDSCAPE CONTEXT

# 3.1 BROADER LANDSCAPE CHARACTER

The broader context in which the proposal is located in is the Western Hill Country of the Waikato District. The landscape is characterised by steep pastoral hill country, interdispersed with exotic tree stands and areas of native vegetation. The proposal is located within the Western Hill Country landscape type as identified in the WRLA. This area encompasses the western hill country located along the west coast of Waikato and includes both volcanic and sedimentary rocks, which is often overlaid by a thick layer of volcanic ash. Landcover includes areas of pasture, exotic forestry and large tracts of indigenous forest especially to the south of Kawhia.

The WRLA describes the landscape as being ".... pastoral farming is the predominant productive rural land use with the majority of farms consisting of hill country. In the Hills west of Otorohanga there is an extensive system of limestone outcrops featuring pinnacles, as well as caves. The limestone forms the karst topography – an amalgamation of caves, underground channels, outcrops, and a bumpy ground surface. The karst landscape and associated caves are a special feature of the Waitomo District."

Overall the character of the area can be described as highly modified with isolated buildings scattered about associated with farming development. The area is not identified as an area of high amenity within the WRLA (Attachments 1 – 1C).

# 3.2 SITE CONTEXT

The topography of the area where the site is located is characterised by steep sided hills which have well defined ridgelines with narrow valley systems occurring to the north and south of the site. The area's topography defines views particularly from the valley areas where ridges or the steep sided hills screen or contain views. The highest local peak from the site is Maungaakohe, which is 344m above sea level.

The landcover is predominantly pastoral with areas of remnant native vegetation associated with the hill slopes and valley systems that run off the ridgelines. Isolated areas of exotic trees occur across the hilly landscape with the stands generally being located on the hill side slopes particularly to the south of the site. Generally, the ridgelines are exposed with little vegetation occurring along the ridges.

Landuse within the study area is predominantly pastoral with areas of exotic trees scattered across the landscape. Rural residential buildings and associated farm buildings within the area are generally sparsely located particularly to the north, west and east of the site, with several houses well dispersed along the Marokopa Valley. Within the hill country area, rural residential dwellings are sparsely located and are typically set within this sheltered, lower lying area away from the ridgeline and generally with associated vegetation.

To the north of the site the area is highly modified with hilly open pastoral land predominating with small areas of remnant bush or tree planting. To the south of the site the landscape has been highly modified, but the extent of remnant/regrowth native bush and forestry combined with the pastoral areas results in a relatively cohesive appearance with a moderate degree of 'natural' appearance. The amenity value varies in relation to each dwelling depending on the orientation of views, degree of screening vegetation and the effects of topography (Attachments 1 – 1C).

The landscape character has been assessed as having a moderate<sup>8</sup> amenity value, and will be assessed in relation to the consented, yet un-built twenty-two turbine windfarm. The consented windfarm is considered to form part of the baseline environment.

<sup>&</sup>lt;sup>8</sup> Average in amount, intensity, quality, or degree. (Oxford Dictionary definition).

# 4 METHODOLOGY

The methodology for assessing the change in height of the wind turbines utilises information obtained from both desk top study and site context investigation. The assessment will address the effects on landscape and amenity values for owners and occupiers within an approximately 15 km identified within the Zone of Theoretical Visibility (ZTV maps) (Attachments 2 - 5), and specifically deal with view locations identified within the site context which is well inside the 15 km radius.

The desktop study included the review of the earlier consented windfarm scheme documentation, the material prepared by Energy3 Services Ltd and the current consent application for the increased turbine height.

The desktop study information has been utilised to help describe the study area, landscape character and evaluate the landscape and visual effects in relation to the increased height of eleven turbines and the reduction in consented turbine numbers from twenty-two to eleven.

With regards to the desktop aspect, technical information has been provided by the Applicant<sup>9</sup>. This information includes:

- T4 Windfarm ZTV Analysis by Energy3 Services Ltd ('Energy3');
- Australasian standards for determining the potential effects of windfarms<sup>10</sup>;
- zones of theoretical visibility (ZTV) mapping (Attachments 2-5);
- 'wire frame' renderings of the topography, consented and proposed turbines (Attachments 6-10);
- visual simulations of the consented and proposed turbines (Attachments 6-10);
- the locations and names of potentially affected parties (Appendix 1); and,
- the Taumatatotara Windfarm Site Plan (Attachment 1 and Appendix 2).

As part of the desktop exercise, the ZTV maps<sup>11</sup> were studied and compared with each other. The purpose of the ZTV mapping was to illustrate the area over which the consented and proposed windfarm can theoretically be seen. The maps are useful to illustrate the potential for views and the extent of the viewer catchment of the windfarm.

When examining the ZTV maps, it is important to understand that:

- ZTV maps do not show how a project will appear or the magnitude of visual effects as they only show an indicative area and extent of potential view;
- They do not take into consideration the potential screening effect of localised vegetation or structures within the area on individual properties;
- The accuracy is limited to the contour information/intervals; and

<sup>&</sup>lt;sup>9</sup> 'T4 Windfarm ZVI Analysis', prepared by Energy3 Services Ltd, 2020.

<sup>&</sup>lt;sup>10</sup> National Wind Farm Development Guidelines Draft, July 2010.

 $<sup>^{\</sup>rm n}$  Figures 10-13; Energy3 Services Ltd report and Attachments 2-5.

 ZTV's are an assessment tool which produces a baseline of the potential maximum visibility of the windfarm, however it does not consider the effects of distance of viewer and the atmospheric conditions in terms of visibility of the turbines.

The potential visual effects have been validated through onsite assessment of the ZTV's with examination of specific viewpoints to assist with further defining and refining the extent of potential visual effects. The purpose of this was to establish whether any views from dwellings or public viewpoints within the receiving environment would potentially see more turbines or more of any one turbine than what was consented (for example, a turbine previously out of sight behind screening topography may have its upper extent visible when taller). **Attachments 4 and 5** illustrate the nett change in visibility between the consented and proposed windfarms. In these maps, it is demonstrated that there will be no nett increase in visibility from dwellings or from public spaces (in this case roads) generated by the proposal compared to what has been consented.

It is further acknowledged that of the eleven turbines that were visible from within the identified dwellings and public places in the ZTV analysis in the consented scheme, the visibility of these eleven turbines will increase as the proposal increases their height. Attachment 5 includes the area where there will be a nett reduction in the visibility of the windfarm due to the southern eleven turbines being surrendered.

Occupants' views from dwellings in the site context will experience an increase in the extent of the visibility of the eleven remaining northern turbines. However, they will no longer see eleven turbines that were consented. It is also acknowledged that the surrendered southern eleven turbines were closer to most dwellings in the area than the retained taller eleven turbines which are further to the north away from the more 'settled' area.

A site visit was undertaken on 8 August 2019 to examine the landscape character and amenity value of the area and consider the potential visual receptors (viewers). Receptor groups include single residential dwellings within the site context (Attachments 1 and 2-5) and travellers passing through the area (i.e. motorists, cyclists and pedestrians). Other than a single new house approximately 0.6 kms northwards along Taharoa Road from the intersection of Taharoa Road and Te Waitere Road (house no. 22, Attachment 1), it was confirmed that the appearance of the setting for the proposal has not altered discernibly since the first consent was granted in 2008.

The site visit investigated and assessed potential view points from public roads and areas adjacent to residential properties - particularly along Marokopa Road and Coutts Road where occupants of dwellings have a direct view towards most of the site. Several stops were carried out and a photographic record was taken. The primary purpose of the site visit was to determine the extent of the study area, the site context and the locations of any potentially affected parties (**Attachment 1**). While it was not possible to observe the site from within the privately-owned dwellings or properties themselves, the site was observed from close by these dwellings on public roads from where the proposal will appear similar.

The 3D visual simulations produced by Energy3 utilise a 3D ground model that is photo matched to replicate the change in view. It is considered that the methodology used, photographic viewpoints selected, and turbines as depicted are sufficiently accurate to illustrate the effects of the change in turbine height and are photographically realistic to

portray the proposed activity. To this extent, the information provided by Energy3 has been relied upon in the conclusions reached in this LVA. The Energy3 methodology is included in the Planner's report<sup>12</sup> at appendix 11 of that report and is consistent with best practice<sup>13</sup>.

The seven-point scale of effects<sup>14</sup> has been used in this LVA when assessing the potential adverse and positive landscape and visual effects arising from the change in turbine height. This effects scale ranges between: 'very low' to 'low' to 'moderate to low' to 'moderate to high' to 'high' to 'very high' for both adverse and positive effects. It is generally understood that 'less than minor' adverse effects are equivalent to the 'very low' and 'low' adverse effects ratings (**Appendix 3**).

<sup>&</sup>lt;sup>12</sup> by Shearer Consulting 5 July 2020.

<sup>&</sup>lt;sup>13</sup> NZILA Best Practice Guide Visual Simulations BPG 10.2.

<sup>&</sup>lt;sup>14</sup> Defined and agreed at NZILA assessment methodology workshop (Christchurch), Dec 4, 2017 (part of a national roadshow facilitated by retired Environment Court Judge Gordon Whiting). Results currently being compiled.

# 5 DESCRIPTION OF PROJECT

Refer to the current Resource Consent<sup>15</sup> application for project description and information pertaining to the proposed rotor types, dimensions and ancillary components.

In summary, consent has been given for the construction of access roads, the placement of transmission lines and installation of twenty-two 110 m high turbines, which to date have not been constructed. The site has well defined but level ridges with steep slopes on the flanks. The local peak to the northern end of the site has an elevation of 340 m with the remainder of the site being at around 320 m above sea level.

The proposal is to increase the maximum height<sup>16</sup> of the northern eleven turbines numbered one to eleven on the site plan (**Attachment 1**) from 110 m to 172.5 m. The proposal also halves the turbine numbers compared to what has been consented. The eleven turbines retained, are proposed to have a nominal turbine with a 95 m hub height and 155 m diameter rotor that will have a 17.5m clearance between blade tip and ground (i.e. 172.5m overall height).

The fundamental design of the turbines and the individual locations of the retained northern eleven<sup>17</sup> turbines are largely unchanged. The increased heights of the turbines will be considered in the context of the consented scheme.

Other aspects, such as the construction methodology and specifics of the access road and transmission lines of the consented project will not fundamentally change and will be constructed in accordance with the current consent conditions. It is also acknowledged that the extent of the earthworks and formed roading will be greatly reduced compared to what has been consented.

In addition to the overall height increase of the eleven retained turbines, other changes are involved at a design engineering level which have negligible changes in terms of landscape and visual effects over what has been consented. Some changes represent net improvements. These changes are included in **Table 1**.

All eleven turbines will use a 'narrow blade' type, which reduces the extent of any shadow flicker effects to what is consented. In addition, the proposed turbine blades have a lower rotation frequency. Both changes are nett improvements which will generate positive landscape and visual effects compared to what has been consented. This is discussed at Section 7.4.3.

The effects considered in this assessment concern both the physical parts of the proposal that exceed what has been consented and the likely effects where turbines have been surrendered. It is understood that the reason for the change of conditions sought (turbine number and size) is to respond to recent changes in windfarm technology that have occurred over the last twelve years since the original proposal was consented in 2008.

<sup>&</sup>lt;sup>15</sup> Taumatatotara Windfarm Application to Change Conditions of Consent, 5 July 2020.

<sup>&</sup>lt;sup>16</sup> From the ground to the tip of the blade when in a vertical position.

<sup>&</sup>lt;sup>17</sup> The locations of the eleven turbines have altered from between 2-86m of their consented locations. See Figure 1 in Energy3 Services Ltd report.

These technical matters are addressed in the overall Assessment of Environmental Effects and are not discussed here.

# 6 STATUTORY DISCUSSION

The proposed activity is in the Rural Zone within the Waitomo District Plan. It is understood that the change of consent conditions application is to be assessed as a discretionary activity under section 127 of the Resource Management Act.

The landscape-based Objectives and Policies below are considered relevant to the proposal.

# 6.1 WAIKATO REGIONAL POLICY STATEMENT

#### Objective 3.20

The values of outstanding natural features and landscapes are identified and protected

#### from inappropriate subdivision, use and development.

The site is not included as an Outstanding Natural Feature or Landscape and as such this objective does not apply to the proposal.

#### Objective 3.21

The qualities and characteristics of areas and features, valued for their contribution to amenity, are maintained or enhanced.

Policy 12.3 gives effect to this objective and identifies different landscape types where their amenity values are to be maintained or enhanced. '*Other landscapes or seascapes or natural features*' (area 'd') is the closest fit to the site. As such, the proposal meets the intent of this objective through a halving in turbine numbers from what has been consented. In this regard any effects on the landscape will be enhanced through a lesser level of development which has been permitted to occur. The proposal now includes less roading, vegetation removal, and loss of land for traditional rural landuse practices. In other regards this objective and policy would have been addressed when the windfarm was first proposed in 2005 where any adverse effects on amenity values were found to be acceptable. The additional height of the eleven turbines is not considered to affect levels of amenity to more than a 'low' degree.

#### Objective 3.22

The natural character of the coastal environment, wetlands, and lakes and rivers and their margins are protected from the adverse effects of inappropriate subdivision, use and development.

The site is not part of a coastal environment, includes no wetlands, lakes or rivers and as such this objective does not apply to the proposal.

## 6.2 WAITOMO DISTRICT PLAN

#### Objective eleven .3.8

To promote use of rural land in a manner which encourages maintenance and enhancement of amenity values of the rural environment, protects outstanding natural features and landscapes from inappropriate use and development, and preserves the natural character of the coastal environment, wetlands, lakes and rivers, and their margins.

### Objective eleven .3.9

### To encourage maintenance and enhancement of rural visual character.

As mentioned above the site is not part of an ONLF, coastal environment, wetlands, lakes and rivers and their margins. However, 'moderate' levels of rural amenity exist at and in the context of the site which need consideration. The additional turbine height will have 'low' adverse effects on rural amenity for the reasons discussed in Section 8 below. It is also acknowledged that for a part of the site; rural amenity values currently enjoyed will be unchanged as the number of turbines is halved compared to what is currently permitted to occur. On balance, it is conservatively determined that the proposal will generate at worst 'low' adverse visual effects and at best 'very high' positive visual effects when compared with the consented environment. It is also considered that due to the areas isolation, low population numbers, low visitor numbers and modified rural landscape character the proposal will not be inappropriate.

# 7 ASSESSMENT OF THE LANDSCAPE AND VISUAL EFFECTS

# 7.1 LANDSCAPE EFFECTS

Landscape effects concern physical changes to the setting which may or may not be seen but are otherwise understood to exist. Landscape effects are also synonymous with effects on character and levels of amenity derived from landscape character or in other words - whether a change to the setting is appropriate or not. Landscape character is comprised from a combination of landform, land cover and land use (or cultural patterns). As such, physical changes to the landscape from the construction of the windfarm beyond what has been consented includes the following:

- While overall vegetation removal will be much less than what is consented as the windfarm is halved in extent, there will be discrete areas where more vegetation removal will be required to allow for the construction of the access road which will need to be wider on corners than what has been consented (below);
- While there is less roading proposed than what has been consented, there will be an increase in the roading width on corners from 10m wide (consented) to 14 m wide.
- While the numbers of proposed turbines have been halved compared to what has been consented, the taller turbines require larger footings at 18 x 18 m (consented footing widths are 14 x 14 m).

The extent of change and the effects on landscape character in relation to the above, have already been largely considered through the consenting process that was carried out in November 2005 and by 'consent' are within acceptable limits.

The increased height of eleven of the retained turbines as illustrated in the photographic montages (Attachments 6-10) provides a comparison of the consented scheme with the increase in height of a lesser number of turbines now proposed. The visual simulations demonstrate that on balance the change in height in conjunction with the reduction in turbine numbers will have a positive effect on landscape character compared with the consented scheme.

Additional potentially adverse landscape effects over those already consented arising from the proposal are confined to close to the construction footprint and will be generated from the larger turbine footing size, wider road bench widths and the formation of theoretically<sup>18</sup> taller cut and fill batters on either side of the road (where required) on corners. These earthworks are proposed to be rehabilitated to natural grades and revegetated as per the original consent conditions. Most of the site roading occurs along a ridgeline at a high point in the landscape above public and private viewpoints. This will limit the road's visibility from these places. It is also understood that the intent for

<sup>&</sup>lt;sup>18</sup> Detailed roading design will be carried out following granting of resource consent for this proposal as is normal practice for a windfarm development.

the location of the roading will be to avoid highly visible slope faces where roading would generate scarring and visually adverse effects (for example at 'switch backs'). Prior to construction, roading plans (among other documents) will be submitted to the Manager Policy and Planning, Waitomo District Council for approval as part of the proposed conditions of consent. The eleven individual turbine footings will be largely below ground level and not visible from land-based public viewpoints. For these reasons, any landscape effects relative to what has been consented will be less given the halving in the number of turbines proposed and the subsequent reduction in the quantum of physical interventions in the landscape to build and provide access to each turbine.

To summarise, in terms of a comparison of effects with the existing consented environment, the reduction in the number of turbines now proposed from twenty-two to eleven will lead to reduced landscape effects. The roading required for the eleven-turbine option will be approximately 40% less in overall length than the twenty-two-turbine consented option. The number of turbine platforms are also halved, albeit they will be larger. The consented twenty-two turbines platforms at 14 x 14 m equate to 4,312 m<sup>2</sup> of platform area, whereas the eleven 18 x 18 m platforms equate to 3,564 m<sup>2</sup> - a nett overall 17% decrease in excavation requirements.

With the location of the roading and turbine platforms obscured from public viewing areas and from off-site landholdings, the earthworks effects are assessed as being noticeably less than what has been consented.

Landscape effects arising from the proposal will be less than what has been consented due to the halving in turbine numbers. Landscape effects are conservatively assessed at 'moderate' positive.

# 7.2 VISUAL EFFECTS

Levels of visual amenity are generally associated with how 'natural' a place is. The more natural or unmodified the place is, the higher the level of visual amenity will be, typically. The site context and the wider rural setting beyond it has been modified over time through vegetation clearance and land drainage practices to provide for pastoral farming activities (**Attachments 1 – 1C and Cover**). This has led to widespread erosion and unsightly scarring of the landscape - particularly on steeper slopes. As such, the landscape surrounding, and including the site cannot be considered as being a high-value landscape and is assessed as having a low to medium degree of 'naturalness'.

Given the extent of change that has occurred within the landscape discussed above, the area's relative remoteness and low population, it is considered that the area including the site potentially has a high level of capacity to absorb change, including windfarms.

In general, from public and most, if not all private viewpoints, there will be a positive change in the landscape and the visual amenity derived from the current proposal when comparing it with the consented twenty-two-turbine windfarm (Attachments 6-10). The visual effects generated by the increased height of the northern retained eleven turbines is offset, or at worst, evenly balanced by the halving in turbine numbers.

# 7.3 EFFECTS OF DISTANCE ON RECEPTORS

The project's Visual Catchment or Zone of Theoretical Visibility (Attachments 2-5 – ZTV Plans) illustrates the potential visibility of the proposed windfarm within the surrounding landscape. The ZTV plans provide a comparison between the consented scheme (Attachment 2) and the proposal (Attachment 3). Effectively there is a small nett increase in the visibility of the turbines (Attachment 4). However, this is small, with the effects of the increase falling on farm and forestry land which would be sparsely occupied. For these reasons, the increased height of the eleven turbines illustrates that any potential adverse visual effects will be 'low<sup>19'</sup> to 'very low<sup>20'</sup> in these areas.

During the site visit and assessment process, it was determined that an additional 62.5 m turbine height will be difficult to discern for occupants of residences and the public for the following reasons:

- Intervening topography and existing vegetation cover will screen or buffer views.
- The distance between turbines and viewpoints will reduce any adverse visual effects through the diminishing effects of perspective.
- The turbines are aligned along a north-south axis away from most residences.
- Most of the residences are located to the south of the site who will be further from the proposed windfarm than they were from the consented windfarm.

The Applicant has prepared 'wireframe' images (**Attachments 6 – 10**) from selected public points in the landscape to help determine the visual effects of the additional turbine height.

As the physical distance from the windfarm increases, any adverse visual effects will correspondingly and gradually lessen. The surrendering of the eleven turbines at the south 'end' of the site near where most residents in the area are located provides an immediate reduction in potentially adverse effects compared to what is consented. Effects of the proposal are concluded to be largely 'positive' to varying degrees which is discussed further in Section 7.4.

Partial views of the consented windfarm will potentially be obtainable from Te Anga Road, parts of Taharoa village<sup>21</sup> and Whakapirau Road. However, the location of dwellings and viewers within these areas is sufficiently distant from the windfarm, that the change in turbine height will not be apparent. Given the halving in turbine numbers, any visual effects of the windfarm will be reduced overall compared with what has been consented with the change in effects being between 'nil' and 'very high' positive depending on viewpoint location.

From dwellings located along the Taumatatotara West Road, Taharoa Road (other than dwelling No.22 which is discussed below in Section 7.4) and Taharoa village itself, residents will not recognise the increased height of the turbines as distance, intervening

<sup>&</sup>lt;sup>19</sup> Low: A low level of effect on the character or key attributes of the receiving environment and/or the visual context within which it is seen; and/or have a low level of effect on the perceived amenity derived from it. (Oxford English Dictionary Definition: Low: adjective-below average in amount, extent, or intensity).

<sup>&</sup>lt;sup>20</sup> Very Low: Very low or no modification to key elements/features/characteristics of the baseline or available views, i.e. approximating a 'no-change' situation.

<sup>&</sup>lt;sup>21</sup> The ZTV mapping suggests that most, if not all views towards the proposal from Taharoa are screened by intervening topography. Taharoa is also over 6 kms from the site which also reduces any potential visual effects.

topography and vegetation patterns will effectively screen most views to the windfarm. Therefore, there will be no discernible change in the visual effects on these parties.

## 7.4 VISUAL EFFECTS ARISING FROM THE SPECIFICS OF THE PROPOSAL

### 7.4.1 ZONE OF THEORETICAL VISIBILITY (ZTV) MAPS

The ZTV maps (Attachments 2-5) map the theoretical visibility of the turbines from all points in the landscape within a 15 km radius. When the existing consent ZTV and the proposed ZTV were digitally compared by Energy3 (Attachments 4 and 5), the nett difference in turbine number visibility between the two can be summarised. The conclusion reached from assessing Attachment 4 is that the increased height of the eleven turbines does not introduce newly visible turbines to the scene relative to some viewpoints. This also appears to be the case from public (road) views. Attachment 5 identifies an area of the receiving environment (red shade) where there will be a nett reduction in the visibility of the proposal due to the southern eleven turbines being surrendered. It is acknowledged that this mapping assumes that no intervening structures and vegetation occurs within the topographical study environment. This would reduce the visibility of the proposal – potentially greatly.

### 7.4.2 HUB AND TOWER HEIGHT

The hub height (measured from the base of the mast) will increase by 58% (60 m to 95m) (**Table 1**). It is concluded that a 58% increase in height over what is consented will have low adverse visual effects. This conclusion is based on the visualisations provided by the Applicant (**Attachments 7, 9 and 10**), which are considered to be accurate and representative.

Increases in the proposed tower diameters (top and bottom), blade stem chord width, hub and nacelle dimensions above what has been consented are between 22% and 40% (**Table 1**). Additional visual effects of these increases will be acceptable given what has been consented, as the scale (and change in scale) of these items is relatively small compared with the overall turbine height increase. From the viewing distances involved, it will be unlikely that these increases are discernible. **Table 1** identifies several changes in the size of the turbine components. The following section assesses the potential visual effects of each of these in turn:

### 7.4.3 BLADE TIP HEIGHT (OVERALL TURBINE HEIGHT)

The blade tip height will increase by 58% over what is consented. However, while this seems large – particularly in the case of the change from a 110 m tall turbine to a 172.5 m tall one, there are two mitigating factors relative to the already consented windfarm. The first is due to the 'narrow' type blade now proposed, with a maximum blade chord width of 4 m<sup>22</sup> which despite the longer blade length and turbine height reduces the extent of the shadow flicker zone compared to what has been consented.

Secondly, the larger turbines generate a slower maximum blade rotation speed of 12.5 revolutions per minute (rpm). The consented turbines rotate at a typical 18 rpm. The

<sup>&</sup>lt;sup>22</sup> 4.4m blade width consented.

slower rpm of the proposal will result in a more languid rotation which will appear 'calmer' and for that reason, less visually intrusive and distracting - particularly in the field of peripheral vision. This goes some way towards compensating for the increased visual effects of overall height.

### 7.4.4 CHANGES AT GROUND LEVEL

Changes at ground level include the footings and roading. The footings diameter increases by 28%. It is expected that any increase in footing size will have nil visual effects as these changes will be largely below ground level and out of public view.

Similarly, there are some increases to roading width compared with what has been consented. These increases will enable longer components to be trucked around complex topographical change points. It is considered that an increase in road width of up to 4 m above what is consented on corners will have acceptable visual effects. This is due to the limited permanent viewing audience, cuts are all on the top of ridgelines (not across side-slopes) and that any theoretical increased heights of cuttings and fill batters will be required to be revegetated as part of consent conditions, should the proposed variation to the consent be granted. It is also acknowledged that overall there will be less changes at ground level included in the proposal compared to what has been consented due to the halving in turbine numbers.

### 7.4.5 SHADOW FLICKER

The extent of the shadow flicker zone is reduced by approximately 100 m compared with the consented turbines as the proposed turbines include 'narrow width' blades. Shadow flicker effects are determined by multiplying the maximum blade chord<sup>23</sup> width by a factor of 265<sup>24</sup>. The maximum blade chord width is 4 m (or a radius of 1,060 m centred on each turbine). It is understood that no additional (recently constructed) dwellings are located within the potential shadow flicker zone compared with the consented windfarm. Shadow flicker effects are therefore not addressed further in this LVA.

### 7.4.6 VISUAL EFFECTS ON SPECIFIC IDENTIFIED THIRD-PARTY DWELLINGS IN THE RECEIVING ENVIRONMENT

The dwellings referred to below are identified in **Appendix 1, 2 and Attachment 1 and 1A** where their views towards the windfarm are assessed from field-based observations and supported with the ZTV analysis mapping (**Attachments 2-5**)<sup>25</sup>. The actual views from within each dwelling were not assessed. However, during the site visit, observations were made, and photographs were taken from public roads near these dwellings looking towards the site. In this regard, an understanding of the likely views was able to be made. It is also acknowledged that intervening vegetation and structures - which may partially or fully obscure views to the proposal from the various dwellings is not included in the

<sup>&</sup>lt;sup>23</sup> Point where the blade width is at its maximum.

<sup>&</sup>lt;sup>24</sup> Table E-2 Summary Modelling Assumptions, EPHC National Windfarm Development Guidelines - Draft July 2010 (Australia).

<sup>&</sup>lt;sup>25</sup> The ZTV mapping has a level of 'coarseness' that prevents a highly accurate assessment of the visibility to be made where dwellings are located on or near the edges of several colour 'shades'. Where this occurs, a conservative assumption on the potential visibility of the proposal is made.

ZTV mapping. For this reason, the ZTV mapping and findings in the following assessment of visual effects will tend to be conservative.

It is acknowledged that there is a consent for a windfarm in place. Therefore, it can be assumed that all potentially affected occupants in the area and the Council have accepted the levels of landscape and visual effects that would be generated by the consented windfarm. As such it is also accepted that any reduction in turbine numbers will have a nett positive effect given that it is assumed people prefer a rural outlook that does not include turbines. The proposal reduces turbine numbers by half, but also increases the overall heights of the retained eleven turbines. Therefore, a balance in the visual effects assessment is required. The next section weighs up the implications of reduced numbers of turbines versus increased turbine heights. Separation distances between dwellings and turbine locations are also an important consideration as are relative elevations in the landscape, including the height of intervening topography between dwellings and turbine locations. The potentially adverse and positive visual effects of the proposal compared with the consented windfarm are discussed below.

### Dwelling '22' (Taharoa Road):

The dwelling at this location was not in place when the original consent was granted, nor when the 2012 change of conditions was approved. It is understood that the dwelling was constructed around 2018<sup>26</sup> and is located on an elevated high point in the landscape at the approximately 280 m contour. The location of this dwelling is shown in the inset on **Attachment 1**.

A field-based assessment of the effects of the proposal from this dwelling has not been undertaken as the assessor was unaware at the time of the 8 August 2019 site visit to the wider area that this dwelling had been constructed. This was due to this dwelling not being visible from the road. However, notwithstanding that the dwelling was unknowingly passed by during the site visit, Viewpoint 7 is located approximately 750 m northwards along Taharoa Road from this dwelling. The windfarm site was viewed from several locations along Taharoa Road, including from near the property where this dwelling is located.

A detailed desktop study has been carried out, testing the ZTV findings with 2D 'line of sight' comparisons using topographical information at key locations between the dwelling and each of the proposed eleven turbines.

Briefly, from this dwelling, it is expected that parts of ten of the eleven turbines will be visible (confirming the findings in the **ZTV mapping, Attachments 3, 5**). In the consented scheme parts of 4-6 turbines would be visible (**ZTV mapping, Attachment 2**).

Through assessing the situation via a 'Google drive-by' and Google Earth the full extent of the proposed turbines appear to be partly screened to varying degrees from views from this dwelling by a ridge to the west and south of the dwelling. The ZTV mapping confirms this. This intervening gently undulating ridge summit sits at an elevation of approximately 300 m whereas the dwelling sits at an elevation of approximately 280 m. The turbines are located on high points that are generally 300 m in elevation. The ridgeline will obscure

<sup>&</sup>lt;sup>26</sup> The presence of this dwelling was brought to the assessor's attention latterly by Craig Shearer, planner for the applicant.

the lower 10% to 90% extent of all turbines other than turbine 8 which appears to be fully screened by the ridge. It is also acknowledged that intervening vegetation located between the dwelling and each turbine has been discounted. This vegetation which includes large trees along or close to the ridgeline has the potential to further reduce the visibility of the turbines.

In the earlier consented scheme, less of the northern eleven turbines would be visible from the dwelling as the turbines were 62 m shorter. However only turbines 8 and 11 would have been fully screened from view. The remaining turbines would have had 10 – 80% of their upper parts visible. Parts of the southern eleven turbines would also be visible, although at substantial viewing distances. As discussed previously, the primary adverse effect is generated by the presence of the turbines – rather than how tall they are. Therefore, in respect of the proposed taller, but fewer turbines, the difference between the consented wind farm and what is proposed is concluded to generate conservatively 'low' adverse visual effects.

### Dwellings '18' and '21' (Marokopa Road):

From dwelling '18' (at an elevation of approximately 18 m ASL) there will be 4-6 turbines visible. From dwelling '21' (at an elevation of approximately 13 m ASL) there will be 1-3 turbines visible (**ZTV mapping; Attachments 3, 5**). In the consented scheme, 7-9 turbines would be visible from dwelling '18' and 4-6 turbines would be visible from dwelling '21' (**ZTV mapping; Attachment 2**).

Variable topography rising to elevations of between 100 m and 240 m, 1.3 kms to 1.6 kms respectively, northwards from dwelling '18' precludes views of the nearest turbines (7 – 11). These turbines are at closest 4.2 kms from the dwelling (turbine 11). Turbines 1 – 6, approximately 5.5 kms (at closest) further north will have their upper extents potentially partly visible. A low ridge (elevation 75 m ASL) approximately 2.6 kms to the north of dwelling 18 will screen the lower parts of these turbines. It is also noted that this low ridge has supported plantation forestry - some of which has been recently harvested. If replanted, plantation forestry will reduce the visibility of the turbines further as the trees establish. Nonetheless, landcover has not been considered in the ZTV mapping or in the assessors 'line of sight' assessment.

From Dwelling '21' the ZTV mapping suggests 1 – 3 turbines will be visible in the proposal. The reality is that this may mean only the upper tips of 1 – 3 turbines are visible as a ridge extending from 220 m ASL to 340 m ASL is located 1.5 – 1.7 kms (approximately midway) between the dwelling and the closest proposed turbine (turbine 11 - approximately 3.7 kms away).

For these reasons any potentially adverse visual effects from the proposal on these two dwellings will be comfortably less than what the effects would be from the consented scheme. The turbines that are visible will be taller, but the overall number of turbines are halved in the proposal and located substantially further away from these dwellings compared with what was consented. It is concluded that the proposal's visual effects when compared to what has been consented will be 'low-moderate' positive for the occupants of dwelling '18' and 'high' positive for the occupants of dwelling 21.

### Dwellings '19' and '20' (off Marokopa Road):

From dwelling '19' (at an elevation of approximately 60 m ASL) and from dwelling '20' (at an elevation of approximately 25 m ASL) there will be 1-3 turbines visible (**ZTV mapping**;

# Attachments 3, 5). In the consented scheme 4-6 turbines would be visible (ZTV mapping; Attachment 2).

Intervening topography at an elevation of approximately 220 m ASL screens turbines 9 – 11 from these dwellings. One to three of the remaining turbines (1 – 8) will be visible to varying degrees, viewed 'up the valley' where there is only low intervening topography present including flat plains in the immediate foreground. However, within northwards views, the intervening hummocky topography provides foreground and medium ground interest where it rises above the drained valley floor. The turbines – visible approximately 5.2 kms away at their closest (turbine 8) will form part of the distant background view.

The fewer turbines visible from these two dwellings will be taller but will also be at least 5.2 kms away (closest turbine 8) where the increase in height over the consented 110 m tall turbine will be unlikely to be appreciated. For these reasons any potentially adverse visual effects from the proposal for occupants of these two dwellings will be less than what the visual effects would be from the consented scheme. It is concluded that any visual effects will be 'moderate' positive.

Dwellings '14', '15', '16' and '17' (Coutts Road):

From occupants' views from dwellings '14' - '16' (at elevations of approximately 40 m, 20m, 15 m and 15 m ASL respectively) there will be 10-11 turbines visible (**ZTV mapping; Attachments 3, 5**). In the consented scheme, 19 - 22 turbines would be visible (**ZTV mapping; mapping; Attachment 2**).

Intervening topography is low, at 140 m ASL offering little screening potential of the proposal to north-eastwards views from these four dwellings. This effect is exacerbated by these four dwellings' slightly elevated locations mostly uphill of Coutts Road (dwelling '14' is located below the road). Plantation forestry - some of which has been recently harvested, is located on the intervening topography. If it is replanted, and when mature, plantation forestry will contribute a degree of screening to the lower parts of most of the turbines. Turbine 11 will be seen in its entirety as it is not screened by the hill or potentially plantation forestry.

The turbines visible from these four dwellings will be taller, but will also be at least 3,850m away (closest turbine no.11). From these dwellings, the increase in height over the consented 110 m tall turbines will be unlikely to be appreciated. Both heights of turbines would be seen rising above the hilly intervening topography.

The consented scheme presented the occupants of these dwellings with a 'broadside' view to at least 7 more turbines located at closest 2,865 m (being surrendered turbine no. 20 relative to dwelling '14' **Appendix 2**). These southern turbines would be more prominent than what is now proposed ranged along the ridgeline and visible across the flat Marokopa Valley floor. For these reasons, any potentially adverse visual effects from the proposal on these dwellings will be less compared to what was consented. It is concluded that the proposal's visual effects when compared to what has been consented will be 'low-moderate' positive for occupants of these four dwellings.

### Dwelling '13' (Coutts Road):

From this dwelling (at an elevation of approximately 17 m ASL) there will be 1-6<sup>27</sup> turbines 'visible'<sup>28</sup> (**ZTV mapping; Attachments 3, 5**). In the consented scheme 13-15 turbines would be visible (**ZTV mapping; Attachments 2**).

Approximately 450 m to the north of this dwelling is a low ridge (elevation approximately 70 m ASL) which screens a large amount of the proposal from view. This is due to the ridgeline's location relatively close to the dwelling, where it has an effective screening role to the proposal which is over 3 kms further on from the ridge. In addition, this hill has supported plantation forestry – some of which has been recently harvested. If it is replanted, plantation forestry will further preclude visibility of the proposal primarily contributed by the topography. It is considered that the ZTV analysis is conservative and it is possible that all of the proposed eleven turbines will be screened from view from this dwelling by a combination of topography and potential vegetation cover.

The extent of the turbines visible from this dwelling will be limited to the rotating upper tips of the blades - at most. The turbines will also be at least 3,700 m away (turbine 11) from the dwelling. From this dwelling the difference between the proposed and consented schemes will be that the rotating tips of the blades may be visible above the hill/plantation compared to several of the southern surrendered eleven turbines being visible in their entirety. In the consented windfarm, 5-6 turbines located approximately 3 km away, located 'broadside' to the dwelling would be visible to occupants via east / south-eastwards views. For these reasons, any potentially adverse visual effects from the proposal for occupants of this dwelling will be substantially less compared to what was consented will be 'high' positive for occupants of this dwelling.

### Dwellings '11' and '12' (Coutts Road)<sup>29</sup>

These dwellings are part of TM Station Ltd which has two proposed turbines (turbines 1 and 2) located on it. It is therefore understood that the owners of these dwellings are supportive of the proposal. Nonetheless, an assessment of the visibility of the proposal is discussed below.

From occupants' views from dwellings '11' and '12' (at elevations of approximately 25 m and 40 m ASL respectively) there will be 10-11 turbines visible (**ZTV mapping; Attachments 3, 5**). In the consented scheme 19 - 22 turbines would be visible (**ZTV mapping; Attachment 2**).

Turbines 10 and 11 will be fully visible as seen from dwellings '12' and '11' respectively, through a small localised valley running in a north-easterly direction away from these dwellings. Other than this valley, the intervening topography approximately 1 km to the north of these two dwellings comprises low hills (elevation ranging approximately 60 m – 150 m) that are substantially below the ridgeline on which the proposed eleven turbines are located (approximately 300 m ASL). For this reason, this nearby topography offers little screening potential of the proposal or what was consented. However, it is

<sup>&</sup>lt;sup>27</sup> The ZTV mapping is too coarse to determine the difference whether 1-3 or 4-6 turbines will be visible.

<sup>&</sup>lt;sup>28</sup> There is plantation forestry located between this dwelling and the proposal which will possibly preclude views of the turbines (**Appendix 2**).

<sup>&</sup>lt;sup>29</sup> It is understood that these houses are owned by one of the landowners who will have turbines on their property. **3-C2022.00** 

acknowledged that this topography has supported plantation forestry - some of which has been recently harvested. If plantation forestry is replanted, when mature, the trees will make a degree of difference to screening the turbines' lower extent from these views.

The turbines visible from these two dwellings will be taller, but will also be at least 3,250m away (closest turbine 10). From this distance, the increase in height over the consented 110 m tall turbines will be unlikely to be appreciated. There will also be a halving in the numbers of turbines visible compared to what has been consented. For these reasons any potentially adverse visual effects from the proposal from these dwellings will be reduced compared to what was consented. It is concluded that the proposal's visual effects when compared to what has been consented will be 'low-moderate' positive for occupants' views from these two dwellings.

### 7.4.7 SUMMARY – VISUAL EFFECTS ON PRIVATE THIRD-PARTY DWELLINGS

In summary, any adverse visual effects of the variation to increase the turbine heights by 62.5m is balanced by the surrendering of eleven turbines which were closer to the twelve potentially affected dwellings at that time. Dwelling '22' is a 'new' dwelling in the area which was not considered when the visual effects assessment was carried out for the previously consented scheme. Nonetheless any visual effects relative to this dwelling have been assessed - based on the consented windfarm forming part of the baseline environment. This dwelling is elevated on a high point at a similar elevation to the windfarm with 360-degree views, where most of the windfarm will be visible, which will generate potentially 'low' adverse visual effects. Relative to the other dwellings located within the site context, the proposal will have varying degrees of positive visual effects on these parties ranging between 'low-moderate' and 'high' positive on the seven-point scale of effects used throughout this LVA.

### 7.4.8 VISUAL EFFECTS FROM PUBLIC PLACES (ROADS)

Local roads are the only public places where people will be able to see the windfarm from. Any views of the windfarm will likely be via glimpsed views due to the typically winding roads in the site context. The degree of visibility of up to eleven turbines will also be affected by the degree of screening from intervening patterns of vegetation including roadside planting and changes in topography within the vicinity. Where the eleven taller turbines will be visible from roads, any potential adverse visual effects arising from the 62.5 m increase in turbine height will be conservatively 'low'<sup>30</sup>. This is due to the typically transient nature of the views, but also because the turbines as per the previous consent will likely have been visible from the same road locations. From some locations along public roads, the proposal may mean that where some previously consented turbines were visible, none are now seen. In this regard any visual effects from these locations on public roads will be 'very high' positive. However, on balance, a conservative 'low' adverse visual effect is reached as in some instances, road users will pass close by the proposal.

<sup>&</sup>lt;sup>30</sup> Low: A low level of effect on the character or key attributes of the receiving environment and/or the visual context within which it is seen; and/or have a low level of effect on the perceived amenity derived from it. (Oxford English Dictionary Definition: Low: adjective-below average in amount, extent, or intensity).

As mentioned in the Introduction - the primary issue is whether a windfarm can be appropriately located in this setting or not. This is partly informed by the quality of the setting, landscape character and landscape values held, the visibility of the turbines and the sensitivity of the viewing audience. The consented 110 m tall turbines are very large structures and so these questions have already been considered and answered to a large degree. In other words, the primary visual effect is generated by the presence of the windfarm. It is generally acknowledged that wind turbines are eye-catching elements seen within the rural landscape - and as such their actual size becomes less relevant.

Given the relatively sparsely lived-in and visited site context – particularly proximate to the northern eleven turbines now proposed and the area's remoteness overall, it is concluded that the 62.5 m increase in height sought will not trigger additional visual effects above 'low'. This is for the following reasons:

- The number of turbines now proposed is half what has been consented.
- The area's remoteness and modified character contributes considerably towards its capacity to absorb further change; being additional to what has been consented.
- The windfarm's north-south orientation and setback from the majority of viewers located on the relatively 'busier' Coutts Road and Marokopa Road.
- The incorporation of a narrow blade which reduces the extent of shadow flicker effects compared with the wider blade consented.
- The winding nature of surrounding roads, often passing through cuttings and passing by roadside vegetation which precludes some views.
- Intervening vegetation patterns in the landscape including forestry which precludes some views.
- The slower rotational speed of the turbine blades when compared with the consented wind turbines.

On balance, any potential visual effects generated by the proposal when compared with the consented environment will be between 'low' adverse (which is generally understood to be equivalent with 'less than minor' in RMA terms) and 'very high' positive.

# 7.5 CONCLUSION - VISUAL EFFECTS

To summarise, aesthetic coherence of the landscape is derived from all of the senses, although the visual sense is typically pre-eminent<sup>31</sup> for most people, where one's appreciation of the landscape is largely obtained. The visual comes under 'amenity values' as defined in the RMA, the other attributes being pleasantness, cultural and recreational values.

It is acknowledged and has been discussed throughout section 8.4 that the additions in turbine height compared to what has been consented is the key generator of the magnitude of the effects on what is essentially both small permanent and transient viewing audiences. However, on balance the difference between what is consented and

<sup>&</sup>lt;sup>31</sup> Sound and smell are also important as they affect one's appreciation of the landscape although these attributes are less relevant here.

what is proposed generates only 'low' adverse visual effects relative to one dwelling (dwelling '22') and for road users. These are conservative findings. For most within the site context whether a permanent resident or public road user any visual effects of the proposal compared with what has been consented will be between 'low-moderate' and 'very high' positive. Halving the proposed turbine numbers constitutes a significant reduction in potentially adverse visual effects. In addition, the surrendered eleven 'southern' turbines were closest to most dwellings and permanent residents within the site context. Any potential adverse effects on amenity values were determined during the earlier consenting process to affect a broader site context compared to now.

# 8 AVOIDANCE, MITIGATION AND REMEDIATION OF EFFECTS

Avoidance of effects has been primarily achieved through locating the proposed retained turbines to the north, away from the more settled areas located along Coutts Road and Marokopa Road. Other avoidance techniques are no different to what has been consented to date which includes locating most of the access roading along the ridgeline - avoiding more visible and potentially erodible slope faces.

No mitigation measures are proposed, nor considered feasible or effective. It is acknowledged that mitigation was not proposed in the original consent application.

As previously discussed, and no different to what has been consented to date, remediation includes the careful battering back of cut and fill slopes to natural grades where possible in areas where the access roading corridor is proposed. These exposed cut and fill areas will be fully revegetated to reduce erosion and prevent landscape scarring.

# 9 CONCLUSION

It is concluded that regardless of the size of the turbines - whether they are 110 m or 172.5m tall, they are all very large structures. It would be not unreasonable to conclude that anyone looking at a wind turbine would have difficulty in determining its height whether it was 110 m tall or 172.5 m tall without the benefit of a side by side comparison.

The purpose of this assessment is to consider the potential adverse landscape and visual effects of the *difference* in the proposal's attributes between what is consented and what is proposed. In other words, what are the effects of the extra height and reduction in turbine numbers? This is achieved with the benefit of the report prepared by Energy3 provided by the Applicant and included in the AEE. It is found that the difference in effects between the consented twenty-two 110 m tall turbines and the proposed eleven 172.5 m tall turbines will have at worst, 'low' adverse visual effects, but for the majority of potentially affected parties, the proposal will generate between 'low-moderate' and 'very high' positive visual effects. Landscape effects arising from the proposal will be less than what has been consented due to the halving in turbine numbers. Landscape effects are conservatively assessed at 'moderate' positive.

The site context is remote with low permanent occupancy. The area appears to be off the 'tourist trail' with Waitomo Caves most likely to be the furthest west most visitors would go.

It is understood that several dwellings near the proposal are on properties owned by those landowners who have agreed to have turbines on their properties.

The site is ideally located to accommodate renewable energy such as a windfarm. The site and setting include substantial modification for farming purposes which includes vegetation clearance practices and drainage works. These landuse practices have adversely affected the physical landscape such as through vegetation removal causing land slips. As such the landscape's outward appearance has been compromised in places. For these reasons, the area is not particularly special and has rural amenity values which are concluded to be conservatively 'moderate<sup>32'</sup>.

The current proposal seeks to halve the consented turbine numbers. The remaining northern eleven now proposed are in similar consented locations (within 86m at most from their originally consented locations). The slower rotational speed of the proposed narrow type blades also helps to balance out any additional visual effects of the height increases.

<sup>&</sup>lt;sup>32</sup> Average in amount, intensity, quality, or degree. (Oxford Dictionary definition).

# 10 LIMITATIONS

This report ('Report') has been prepared by WSP New Zealand Limited ('WSP') exclusively for Taumatatotara Windfarm Ltd. ('Client') in relation to the preparation of a Landscape and Visual Assessment report to be part of a wider Assessment of Environmental Effects which will be submitted to the Waitomo District Council ('Purpose') and in accordance with the agreement dated 14 October 2020 ('Agreement'). The findings in this Report are based on and are subject to the assumptions specified in the Report and other technical documents provided by the Client. WSP accepts no liability whatsoever for any use or reliance on this Report, in whole or in part, for any purpose other than the Purpose or for any use or reliance on this Report by any third party.

In preparing this Report, WSP has relied upon data, surveys, analyses, designs, plans and other information ('Client Data') provided by or on behalf of the Client. Except as otherwise stated in this Report, WSP has not verified the accuracy or completeness of the Client Data. To the extent that the statements, opinions, facts, information, conclusions and/or recommendations in this Report are based in whole or part on the Client Data, those conclusions are contingent upon the accuracy and completeness of the Client Data. WSP will not be liable for any incorrect conclusions or findings in the Report should any Client Data be incorrect or have been concealed, withheld, misrepresented or otherwise not fully disclosed to WSP.

### Qualifications and Assumptions

The services undertaken by WSP in preparing this Report were limited to those specifically detailed in the Agreement and the Report and are subject to the scope, qualifications, assumptions and limitations set out in the Report and/or otherwise communicated to the Client. Except as otherwise stated in the Report and to the extent that statements, opinions, facts, conclusion and/or recommendations in the Report ('Conclusions') are based in whole or in part on information provided by the Client and other parties ('Information'). The Information has not been and have not been verified by WSP and WSP accepts no liability for the reliability, adequacy, accuracy and completeness of the Information.

The data reported, and Conclusions drawn by WSP in this Report are based solely on information made available to WSP at the time of preparing the Report. The passage of time; unexpected variations in site conditions; manifestations of latent conditions; or the impact of future events (including (without limitation) changes in policy, legislation, guidelines, scientific knowledge; and changes in interpretation of policy by statutory authorities); may require further investigation or subsequent re-evaluation of the Conclusions.

### Use and Reliance

This Report should be read in its entirety and must not be copied, distributed or referred to in part only. The Report must not be reproduced without WSP's prior approval in writing. WSP will not be responsible for interpretations or conclusions drawn by the reader of the Report. This Report (or sections of the Report) must not be used as part of a specification for a project or for incorporation into any other document without WSP's agreement in writing.

### Disclaimer

No warranty, undertaking or guarantee whether expressed or implied, is made with respect to the data reported or the Conclusions drawn. To the fullest extent permitted at law, WSP, its related bodies corporate and its officers, employees and agents assumes no liability and will not be liable to any third party for, or in relation to any losses, damages or expenses (including any indirect, consequential or punitive losses or damages or any amounts for loss of profit, loss of revenue, loss of opportunity to earn profit, loss of production, loss of contract, increased operational costs, loss of business opportunity, site depredation costs, business interruption or economic loss) of any kind whatsoever, suffered on incurred by a third party.

# TABLE 1:

### Comparison between proposed and consented turbines and net change

Design specifics	<b>Proposed</b> (narrow blade)	Consented	Change (%)
Overall height (metres)	172.5	110	+ 58
Hub height (metres)	95	60	+ 58
Blade stem chord (metres)	2.8	2.3	+ 22
Blade chord (widest) (metres)	4	4.4	reduced
Tower diameter (top) (metres)	3	2.3	+ 30
Tower diameter (bottom) (metres)	4.1	3.2	+ 28
Rotor diameter (metres)	155	100	+ 55
Hub diameter (metres)	5.76	4.1	+ 40
Nacelle width (metres)	5.8	4.2	+ 38
Nacelle length (metres)	17.4	12.5	+ 39
Footing dimensions (metres)	18 x 18	14 x 14	+ 28
Roading width (straight sections) (metres)	4	4	same
Roading on corners (metres)	14	10	+ 40
Rotational Speed (RPM)	11.1	18	reduced
Multiplier (for shadow flicker)	265	265	same
Shadow Flicker extent (metres)	1060	1166	reduced
Number of turbines	11	22	reduced

The above comparison table includes technical information provided by the Applicant. This information is also relied upon when assessing the landscape and visual effects of the current application to vary the consent.

# **APPENDIX 1**


NEAREST 3<sup>RD</sup> PARTY HOUSES

10.10 - 194	THE.	Start 1	24	-	1
and the second			1	3	1
		100	10°	10-0	
		il Partie		1	
R. S. M. Son				1992	
A State of the		REAL	A DOCTOR	easting	northing
		31-1-1-1-1	11	2.664,654.93	6,326,648,21
	1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -		13	contract the standard day plant and the standard little	6,326,065.32
		A state M	14		6,325,681.96
Sec. 1		111	15	2.665,654.97	and the second se
14	1		16		6,324,644.58
	1	10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 -	17		6,324,333.92
-	100	AND A VERY	18		6,324,867.16
1.000	and the	Self Street	10		6,324,562.72
			20		6.324,739.65
	Contraction of the second	ALC: NOT A	21	2.667,997.41	6.325.423.02
A second s	163	and the second			
	1 1 1 1 1 1 1	ROMA			
in sure land	12 4				
	A 199 - 53				
15 The state of the state of th			- 1 T		- Caller
	1 1 1 H	COL LAND	Report of		
Contraction (Aligned	and the instant		- 100		and the second
and the second se		Contract of the	10		
112 12 17 17 17 17 17 17 17 17 17 17 17 17 17	1	300 3.51			Carlo and
DU A	La Contra C	100	1.2.7		
	Conference and Conference	ACCOUNT OF THE	1		
	200 / 19 B		1.0	-91	1 2
				Augumotics Un	
			1		
AND THE A	John No an		-4	-	El anda
- here and a	10.	untin 1	11 -	1	18 14
1 1 1 1 1	synder og Williamil		din.	1200	a fair a
and the second sec	1 175	The second second	OTODARD-SL S	ann an An	12.
7.0	ter Mitthell, Ormetha Mitthew Viet	William .	110		1 46 82
and the second	a Ja		orden dinna		and the second second
1000	W Montesen (manipulation)	Mar International Action		100	Sector 1
The second se	And the second of a contract of the second of a	(Algebra Alleren a		And Persons in which the	and the second second
the of the Pull	1 12 10			122-60	Service of the
State of the second second		and the second	-	the second second	State No.
and the second	10th and	- and a state - P	in the second	120	-
R. B.	where the second	and and	100	20.10	-
Rouse File	12 1 1	- CLARKER	211-	1. 1.	A. H
	- AC	A CONTRACTOR	1 2 4	20	and a
California .	1 alter the second	AND A	1.15	12. 1	-5-1
and a start of	100 2	1 1 1 1	A VAL	1	
where is 14	S LABORE	S Lat rill	51 3	6	11: 20
and the second se	A REAL PROPERTY AND A REAL	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		1 1 1 m 1	and the second se

Coordinates in NZMG (NZGD1949) Cadastral Ref: LandOnline 03/08/19 Manawatu Aerial Photo Services RN 26/08/19 T4 Windfarm

# **APPENDIX 2**

CONSENTED TURBINE LOCATIONS PLAN

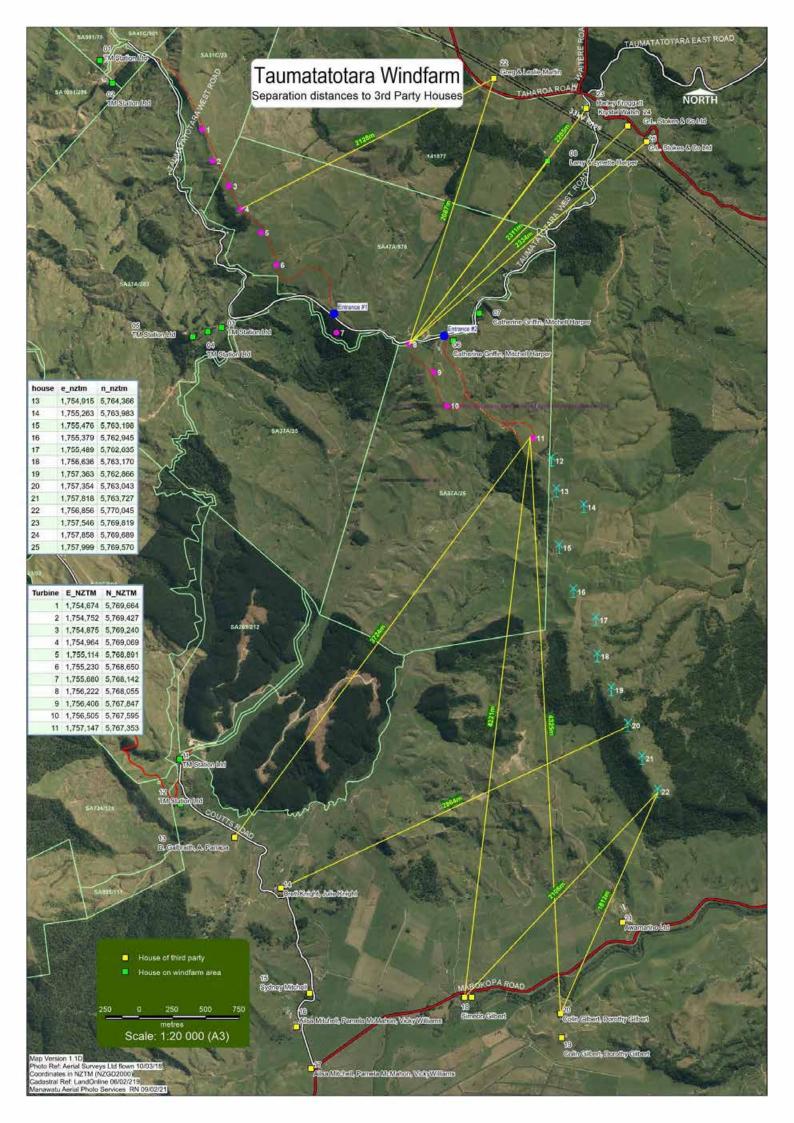

# **APPENDIX 3**

SEVEN POINT SCALE OF EFFECTS

### Scale of Effects (7 Point)

From the Aotearoa New Zealand Landscape Assessment Guidelines prepared by the NZILA; Dec 8, 2020 (draft)

### The below seven-point scale is used to describe effects:

- Very High: Total loss to the key attributes of the receiving environment and/or visual context amounting to a complete change of landscape character
- High: Major change to the characteristics or key attributes of the receiving environment and/or visual context within which it is seen; and/or a major effect on the perceived amenity derived from it.
- Moderate-High: A moderate to high level of effect on the character or key attributes of the receiving environment and/or the visual context within which it is seen; and/or have a moderate-high level of effect on the perceived amenity derived from it.
- Moderate: A moderate level of effect on the character or key attributes of the receiving environment and/or the visual context within which it is seen; and/or have a moderate level of effect on the perceived amenity derived from it. (Oxford English Dictionary Definition: Moderate: adjective-average in amount, intensity or degree).
- Moderate-Low: A moderate to low level of effect on the character or key attributes of the receiving environment and/or the visual context within which it is seen; and/or have a moderate to low level of effect on the perceived amenity derived from it.
- Low: A low level of effect on the character or key attributes of the receiving environment and/or the visual context within which it is seen; and/or have a low level of effect on the perceived amenity derived from it. (Oxford English Dictionary Definition: Low: adjective-below average in amount, extent, or intensity).
- Very Low: Very low or no modification to key elements/features/characteristics of the baseline or available views, i.e. approximating a 'no-change' situation.